




# Specifications

## 2010 SC-48-S3 Live Bottom Trailer

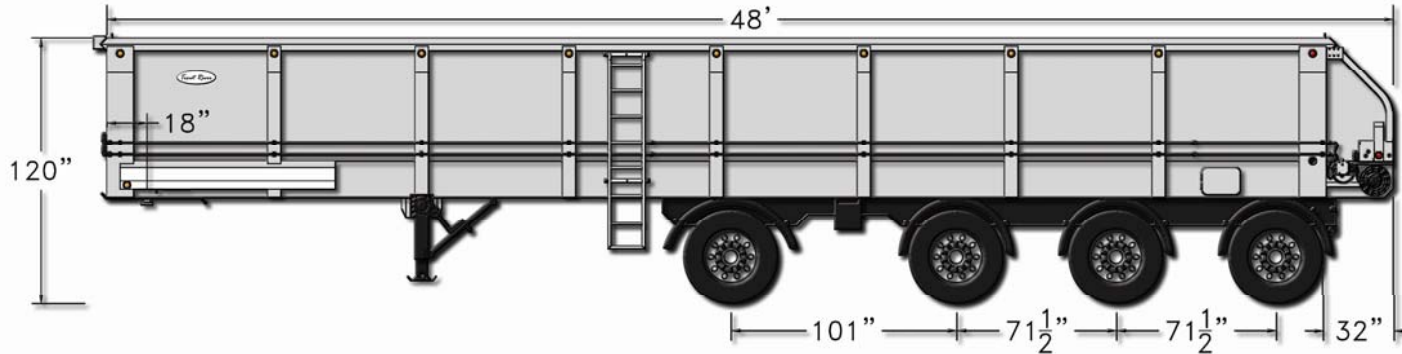

### Specifications

- Overall Length: **48'-0"**
- Overall Width: **102"**
- Overall Height: **120"**
- Capacity: **52.25 yd<sup>3</sup>**
- Tare Weight: **23,520 lbs**
- Start-Up Pressure: **2,400 PSI**
- Working Pressure: **1,500 PSI**

### All Trout River Trailers Feature

- ▶ 39" Wide conveyer system
- ▶ Variable speed and reversing control for conveyor system
- ▶ TRI proprietary chain drive with removable cross bars
- ▶ Standard butterfly quick connect hydraulic hook ups
- ▶ Adjustable chain oiling system
- ▶ High strength 80,000 psi steel sides and ribs
- ▶ LED lighting system
- ▶ Holland® Mark V 2 speed landing gear
- ▶ Haldex Antilock Brake System
- ▶ Safety strobe lights at rear of trailer
- ▶ Safety reversing audible alarm
- ▶ Air powered tailgate with electric controls (opens full 90°)
- ▶ Central access ladder
- ▶ Flip-up rear mud flaps
- ▶ Long life urethane paint with rust inhibiting primer

### Standard Equipment For This Model

- ▶ Cramaro Slide 'N Go™ end to end mesh vinyl tarp
- ▶ Hendrickson INTRAAX® 14" fixed air suspension (25,000 lbs)
- ▶ KGI self-steer axle with Hendrickson HT-250 lift air suspension
- ▶ 22.5" Continental HSC tires on white steel wheels

### Payloads

Regulation	Approximate Payload*
Ontario SPIF #3 vehicle	41,130 kg 90,680 lbs
Quebec class A.68 vehicle	36,935 kg 81,420 lbs
New Brunswick Special Permit: Vehicle #1	36,935 kg 81,420 lbs

\*Note: Payloads will vary depending on motor unit dimensions and weight.