




Specifications

2010 SC-31-2 Live Bottom Trailer

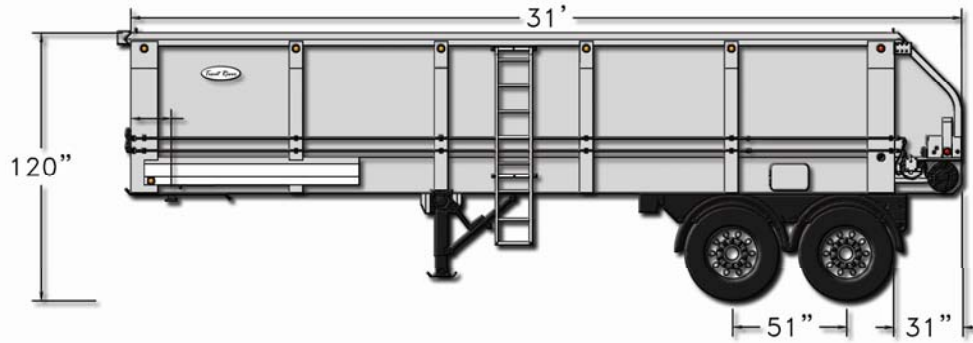

Specifications

- Overall Length: **31'-0"**
- Overall Width: **102"**
- Overall Height: **120"**
- Capacity: **32.5 yd³**
- Tare Weight: **14,300 lbs**
- Start-Up Pressure: **2,400 PSI**
- Working Pressure: **1,500 PSI**

All Trout River Trailers Feature

- ▶ 39" Wide conveyer system
- ▶ Variable speed and reversing control for conveyor system
- ▶ TRI proprietary chain drive with removable cross bars
- ▶ Standard butterfly quick connect hydraulic hook ups
- ▶ Adjustable chain oiling system
- ▶ High strength 80,000 psi steel sides and ribs
- ▶ LED lighting system
- ▶ Holland® Mark V 2 speed landing gear
- ▶ Haldex Antilock Brake System
- ▶ Safety strobe lights at rear of trailer
- ▶ Safety reversing audible alarm
- ▶ Air powered tailgate with electric controls (opens full 90°)
- ▶ Central access ladder
- ▶ Flip-up rear mud flaps
- ▶ Long life urethane paint with rust inhibiting primer

Standard Equipment For This Model

- ▶ Cramaro Slide 'N Go™ end to end vinyl tarp
- ▶ Hendrickson INTRAAX® 14" fixed air suspension (25,000 lbs)
- ▶ 22.5" Continental HSC tires on white steel wheels

Payloads

Regulation	Approximate Payload*
Ontario SPIF #1 vehicle	27,590 kg 60,830 lbs
Quebec Class A.12	27,410 kg 60,430 lbs
Atlantic Provinces Category #1	27,410 kg 60,430 lbs

*Note: Payloads will vary depending on motor unit dimensions and weight.